


# SeasonGuard

## RETRACTAWAY SCREEN

### Measuring Guide and Colors

#### How to Measure for a Standard Face Mount Screen

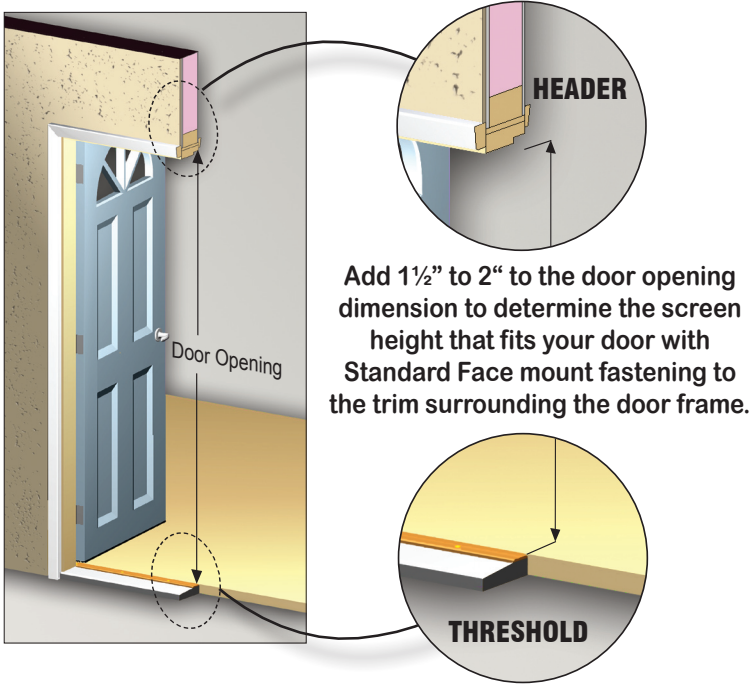

#### Face Mount Installation



**1** Cut sill track and fasten to threshold.



**2** Fasten mounting base with patent screws.



**3** Snap Screen assembly to mounting-base.



**4** Fasten top track with adjustment screw.

**For inside frame mount measuring instructions, go to: [howtomeasure.seasonguard.com](http://howtomeasure.seasonguard.com)**


Single door up to 42" wide require 1 RetractAway Screen  
 Double door 42" to 84" wide require 2 RetractAway Screens

Standard screens are designed to fit standard doors with a face-mount installation, and a door trim greater than 1 inch.

Standard Sizes		
Screen type	Door Opening	Screen Size
Stock	79" – 80½"	81½"
Special	95" – 96½"	97½"

**Standard 81.5" screens fit standard swing door frames with face mount fastening to the trim surrounding the door frame.**

#### Fits All Threshold Types

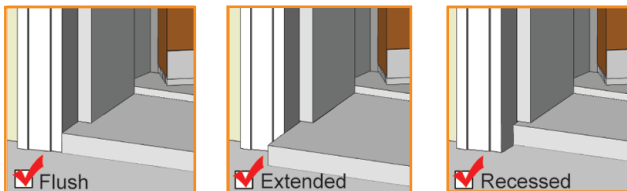

Custom Sizes		
Screen Type	Smaller Than	Screen Size
Custom	81 ½" Screen, (in ½" increments only)	70" – 81"
Custom	97 ½" Screen, (in ½" increments only)	82" – 97"

Customs sizes are only available in ½" increments

#### Tools Required:



Drill and driver bits are included



Tools required: Hack saw & Power drill

#### Colors

RetractAway Screens are available in four colors: White, Sandstone, Brown, Almond and Charcoal. The sill track finish is always clear anodized aluminum.



#### How to Measure for a Replacement Screen Mesh:

Measure the total height of the screen roll cover. This dimension should be from 70" to 97 ½" in ½" increments. The screen width is not required.